# H5+H6

LARGE FIREPLACES



NEW V-CLASS BURNER MAXIMIZES RADIANT HEAT.



## THE SCIENCE OF WARMTH

Since 1890, we've been pioneering and perfecting radiant heat technology that generates constant, comfortable warmth within your home.

**REALISTIC LOGS** 

**RADIANT HEAT** 

We put radiant warmth into every fire. You can feel it.

High definition, low mass fiber ceramic logs heat up and glow quickly, radiating warmth.

#### **CERAMIC GLASS**

Durable and robust ceramic glass improves radiant performance.

#### **ALUMINIZED STEEL**

Lightweight, high temperature aluminized steel firebox delivers efficient warmth and prevents rust and wear.

Proudly Made in North America

## ADJUSTABLE HEAT

Adjustable flame for constant, even warmth without having to cycle the fire on and off.

#### **ON COVER:**

H6 BIRCH 1400BLK PLAIN BLACK LINER 1460PBL CLEAN INSTALL KIT 1430QK





## **H5** LOGS

We designed these expertly crafted fire beds as realistic-looking as possible, and engineered them to harness radiant heat from the flames and glowing embers.

#### **MICRO MESH®**


Our Micro Mesh® is a fine mesh on our safety screens: let's you take in the fire and logs—and not the screen.

#### **H5 BIRCH**







H5 TRADITIONAL LOGS

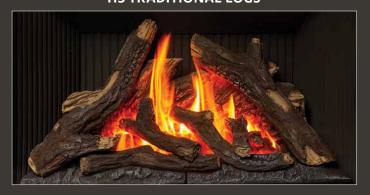

H5 DRIFTWOOD

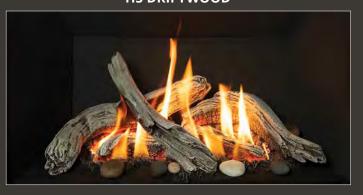

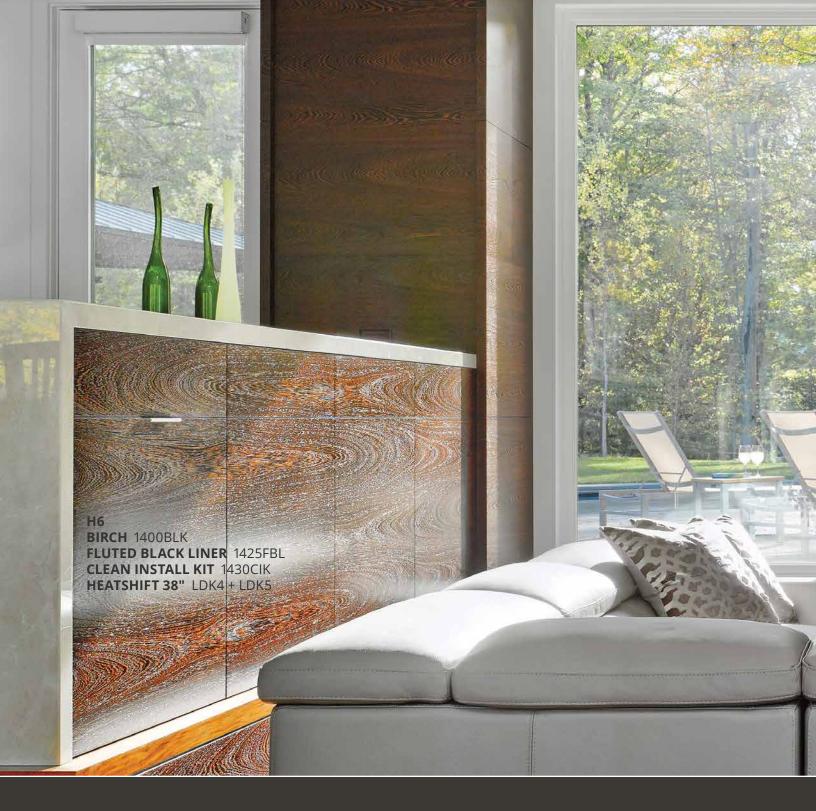

## **H6** LOGS

For more images of our logs and videos of their fires, go to valorfireplaces.com or to see in person, visit your local Valor dealer.

**H6 BIRCH** 





**H6 TRADITIONAL LOGS** 



**H6 DRIFTWOOD** 





## 2 LINERS

A liner can change the whole look of a fireplace and fire. Consider a firebox liner that complements your front as well as your fire bed.


Visit your local authorized Valor dealer to see a liner in person, or go to <u>valorfireplaces.com</u>

#### **PLAIN BLACK**



**FLUTED BLACK** 



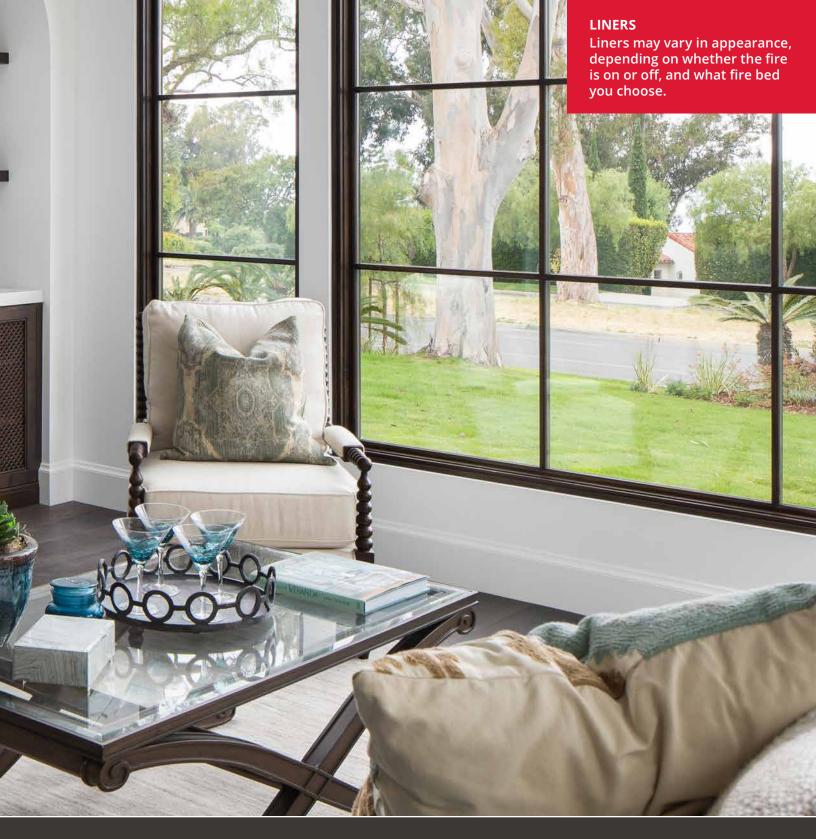

REFLECTIVE GLASS



HERRINGBONE



**LEDGESTONE** 



**RED BRICK** 





## **3** FRONTS

We offer a selection of premium fronts for your fireplace. See more examples at your local Valor dealer or go to <u>valorfireplaces.com</u>

#### **H5 EDGEMONT CRAFTSMAN FRONTS**

These fronts are exclusive to the H5 fireplace.







H5 PEWTER



**CLEAN INSTALL KIT** 



H5 + H6 FRONTS

Design your fireplace in our Design Center



These styles are available on both the H5 and H6 fireplaces.



This floating front sits proud of the wall by ½".



**FIXED FRAME KIT** 

**3-SIDED BLACK** 

**4-SIDED BLACK** 



## **4** FINISHES

Whether it's a powdercoated or plated trim, our finishes are made to last. Ask your Valor dealer to see a finish sample in person.

**BLACK** 



**CRAFTSMAN PEWTER** (H5 ONLY)



CRAFTSMAN AGED STEEL (H5 ONLY)







Pioneered by Valor, our unique HeatShift System naturally circulates up to 125 cubic feet of convective heat per minute through hidden ducts and back into the room—avoiding surface areas above the fireplace.

Run standard finishing materials right up to the fireplace surround, including drywall, wood, tile and stone.

Install mantels lower than usual at a one-to-one ratio of depth to height from the fireplace surround.



#### **IMPROVES PERFORMANCE**

Harnessing convective warmth, up to 60% of fireplace heat rises and flows through HeatShift and back into the room. The remaining heat radiates from the fireplace, keeping you warm.

#### NO ELECTRICITY REQUIRED

HeatShift circulates heat naturally using gravity and Valor product ingenuity—no need for a fan or electricity. No power—no problem.

#### **CONSTRUCTION MADE EASY**

Unlike many competing products, Valor fully ducts HeatShift for clean, safe air quality. HeatShift is built and designed in North America for North American homes, meeting building code requirements.



## **VALOR 10: REMOTE**

#### **VALOR 10 REMOTE CONTROL NEW**

Standard with the H5 and H6, Valor's new interactive remote control has up-to-the-moment information on the state of your fireplace—such as temperature and other customizable settings.

Learn more about our remote and app:





## **VALOR 10: APP**

#### **VALOR 10 APP NEW**

The Valor 10 remote pairs with the Valor 10 App so you can control your fireplace with your smartphone.







## ENERGY EFFICIENCY


To find out more, visit valorfireplaces.com/efficiency


#### **EFFICIENCY RATINGS**

While the North American fireplace industry is largely self-regulated, at Valor we use recognized Canadian and US government testing methods to determine our energy efficiencies, and ensure our products perform in your home as rated. All our fireplaces are available as natural gas or propane.

#### **SECONDARY HEAT EXCHANGER**

The built-in Secondary Heat Exchanger naturally improves convective heat—removing the need for a fan. Your fire will heat up fast for immediate comfort—and with no need for electricity, you'll save money.

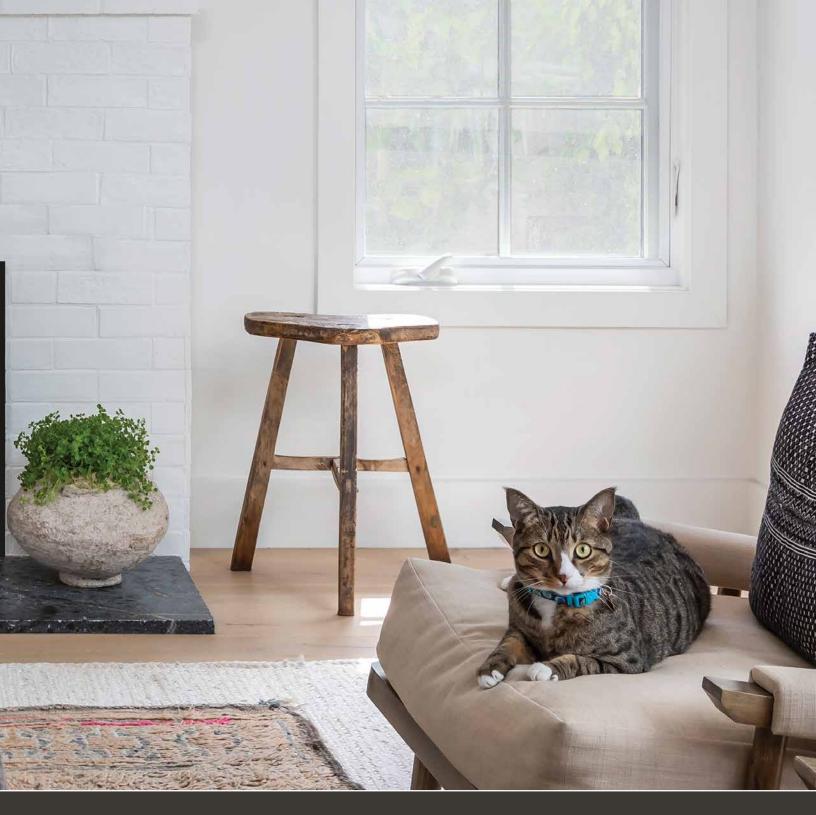



H5 1100MN/MP
Energuide 71%
High 30,000
Low 16,000
Max Output\* 22,857

 H6 1400MN/MP

 Energuide
 71%

 High
 36,000

 Low
 18,500 NG | 15,000 Propane

 Max Output\*
 26,928

\*EnerGuide ratings and outputs have been determined without a fan/blower, using the CSA P.4.1-15 test method.

Certified to ANSI Z21.88/CSA 2.33 Vented Gas Fireplace
Heater American National Standard. CGA-2.17-91 Gas Fired
Appliances for use at High Altitudes.

Find out more about Valor's energy efficiency









## **FRONT DIMENSIONS**

#### H5 FRONTS

Clean Install 36" W x 25% T

Fixed Frame 351%" W x 25%" T 1" frame

**3-Sided** 40½" W x 30%" T 3¼" frame

**4-Sided** 41⅓₃" W x 32⅙" T 4" frame

Craftsman
41%" W x 31%" T
214" frame

#### H6 FRONTS

Clean Install 42" W x 31¾ T

Fixed Frame 41¾" W x 33" T 1" frame


**3-Sided** 46¼" W x 36¾" T 3¼" frame

> **4-Sided** 47%" W x 38%" T 4" frame


ALWAYS REFER TO THE INSTALLATION MANUAL FOR COMPLETE INSTRUCTIONS.




## **DIMENSIONS**



	H5	Н6
W	30"	36%"
Н	191⁄4"	25½"
С	29"	34½"




ALWAYS REFER TO THE INSTALLATION MANUAL FOR COMPLETE INSTRUCTIONS.






	<u>H5</u>	<u>H6</u>
Α	41½" min.	49½" min.
В	40"	48"
С	27½"	32%"



	<u>H5</u>	<u>H6</u>
Α	38"	43%"
В	36%"	42¼"
С	25¼"	27%"
D	13¾"	15%"
Е	171/2"	20%"
F	18"	21%"

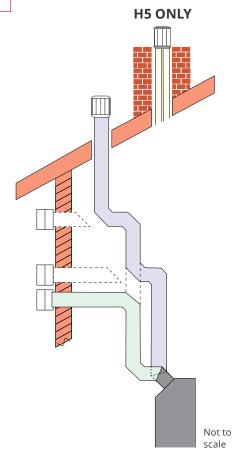

- Total length of vent pipe can't exceed 40 feet.
- Minimum vent rise after first elbow: H5, 12" minimum; H6, 24" minimum.
- Maximum of 4 x 90 degrees elbows or equivalent (2 x 45 degrees—90 degrees).
- Colinear venting into existing chimneys with H5.

### **OPTIONS**

DIRECT VENT ENGINE	<u>H5</u>	<u>H6</u>
Natural Gas	1100MN	1400MN
Propane	1100MP	1400MP

#### 1 FIRE BEDS

Birch	1100BLK	1400BLK
Traditional Logs	1100LSK	1400LSKV2
Driftwood	1100DWK	1400DWKV2

#### **2** LINERS

Plain Black	1160PBL	1460PBL
Ledgestone	1115LSL	1415LSLV2
Fluted Black	1125FBL	1425FBL
Reflective Glass	1170RGL	1470RGL
Herringbone	1175HBL	1475HBL
Red Brick	110VRL	

#### **B** FRONT

Clean Install Kit	1130CIK	1430CIK
Fixed Frame Kit	1130FFK	1430FFK
3-sided, Black	1135TSB	1435TSB
4-sided, Black	1140FSB2	1440FSB2
Edgemont Craftsman Aged Steel	1184ECAS	
Edgemont Craftsman Pewter	1184ECPW	

#### **OPTIONAL**

Outdoor Conversion Kit	GV60CKO	GV60CKO
Remote Blower for Zone Heating*	1270RBK	1270RBK
Circulating Fan	1195CFK	1495CFK

<sup>\*</sup>Use with LDK1 or LDK4 only.

#### **HEATSHIFT** (Recommended)

48" Plenum + white Finishing Frame	LDK1 + LDK2	LDK1 + LDK2
38" Plenum + white Finishing Frame	LDK4 + LDK5	LDK4 + LDK5
30" Plenum + white Finishing Frame	LDK9 + LDK10	LDK9 + LDK10
14" Plenum + white Grilles (2)	LDK3	LDK3
Valance, two plates (hidden)	LDK7	LDK7

#### **△ WARNING**

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov







