




H5 1100M

August 2021

1/2

Overview

Note: This appliance may be installed in outdoor, weather protected environments as defined in the GV60CKO Outdoor Conversion Kit instruction manual.

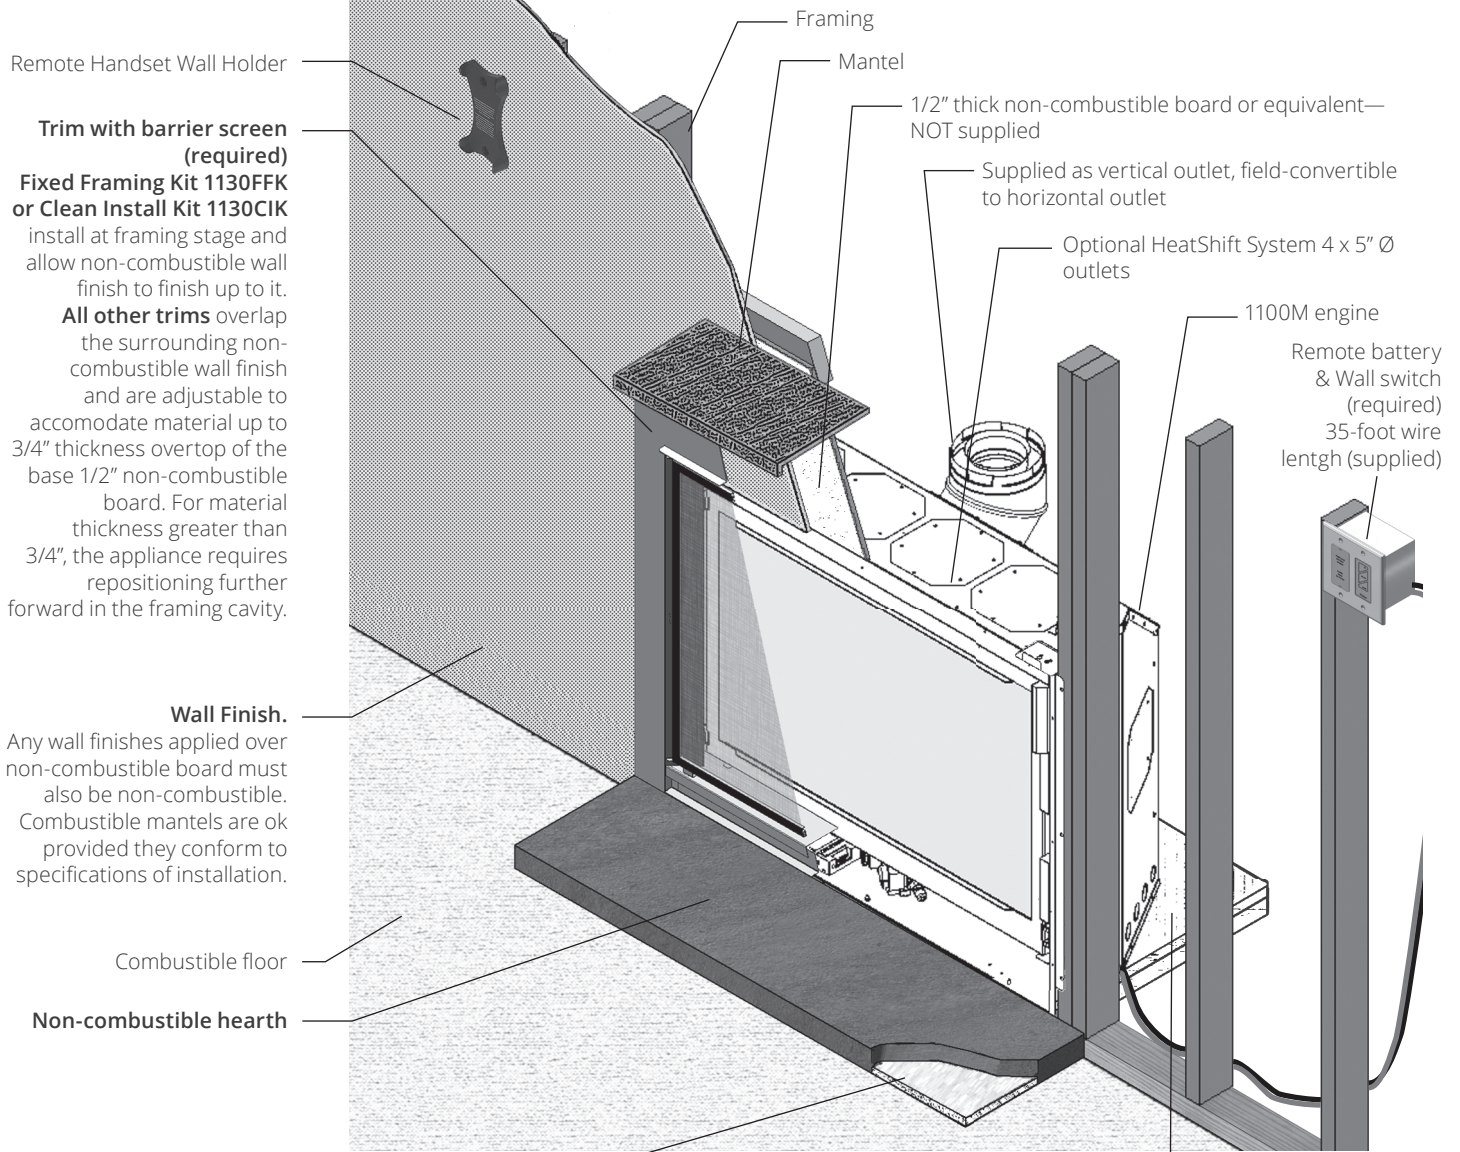

Trim with barrier screen (required) Fixed Framing Kit 1130FFK or Clean Install Kit 1130CIK

install at framing stage and allow non-combustible wall finish to finish up to it. All other trims overlap the surrounding non-combustible wall finish and are adjustable to accommodate material up to 3/4 inch thickness overtop of the base 1/2 inch non-combustible board. For material thickness greater than 3/4 inch, the appliance requires repositioning further forward in the framing cavity.

Wall Finish. Any wall finishes applied over non-combustible board must also be non-combustible. Combustible mantels are ok provided they conform to specifications of installation.

Combustible floor

Non-combustible hearth

1/2 inch Micore supplied with appliance.

Use as a thermal break between non-combustible hearth material and combustible material underneath.

Combustible Framing Allowed Beneath Fireplace. Do not install the appliance directly on carpet.

Valor® H5 1100M

August 2021

2/2

Dimensions

