

# valor® H6 1400M


Nov 2022

1/3

## Framing—Stud Framing Dimensions

### NOTE


Use of optional HeatShift System affects framing. See fireplace Installation Manual.

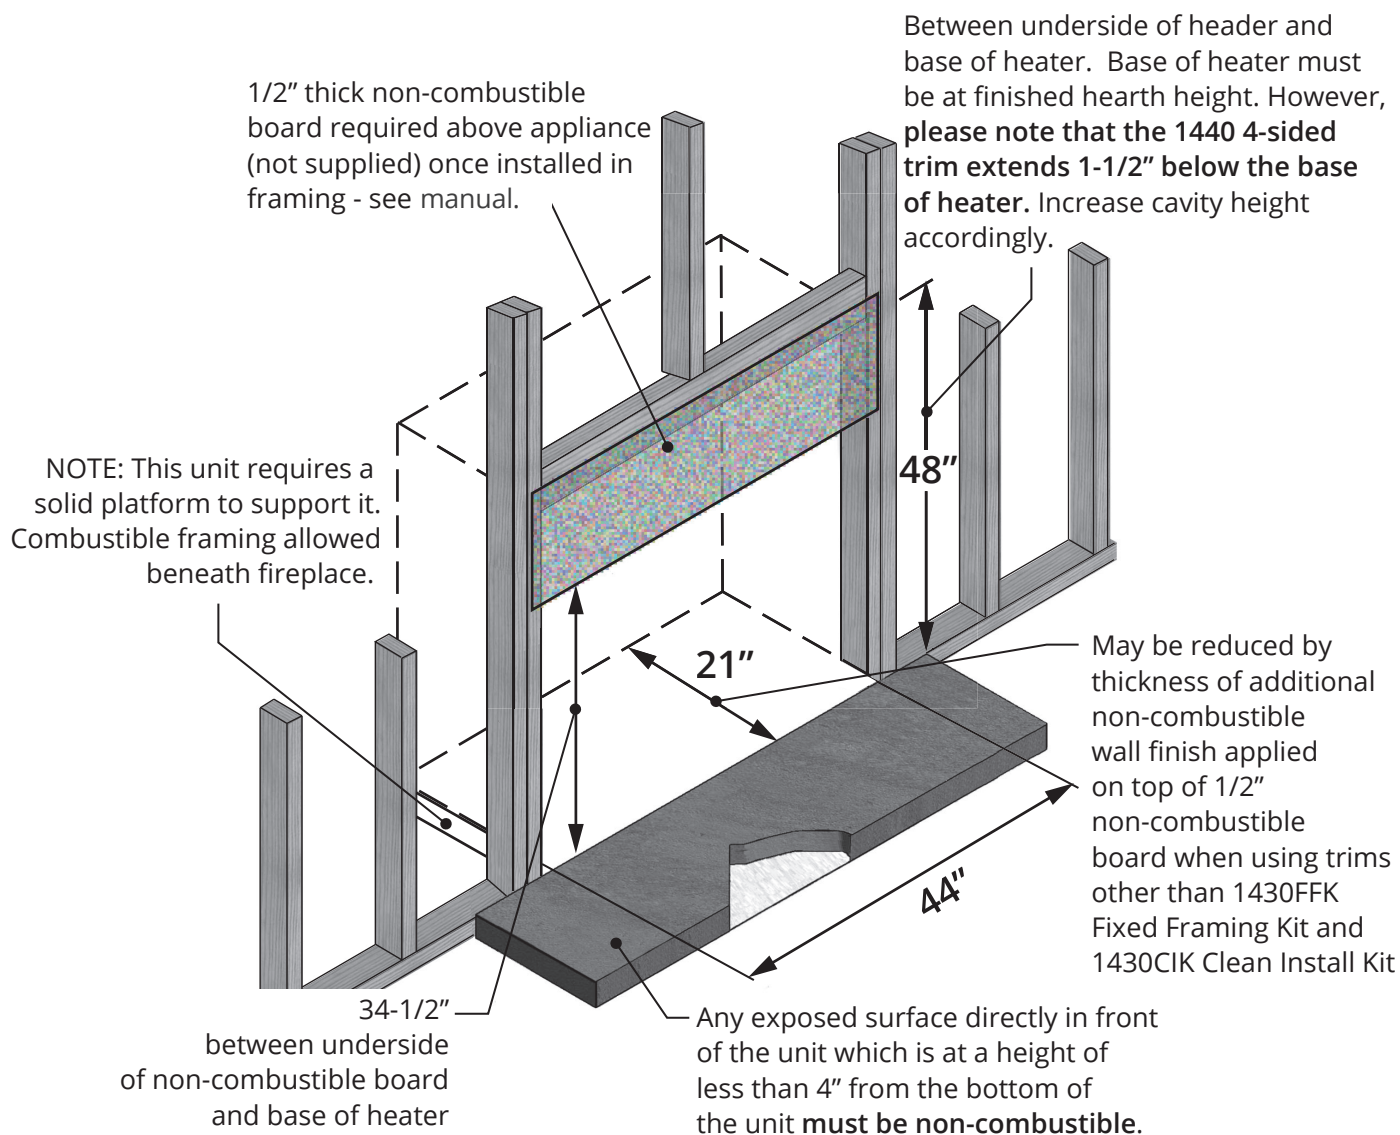

# valor® H6 1400M

## Framing—Built-in Recess, Top Outlet

Nov 2022  
2/3

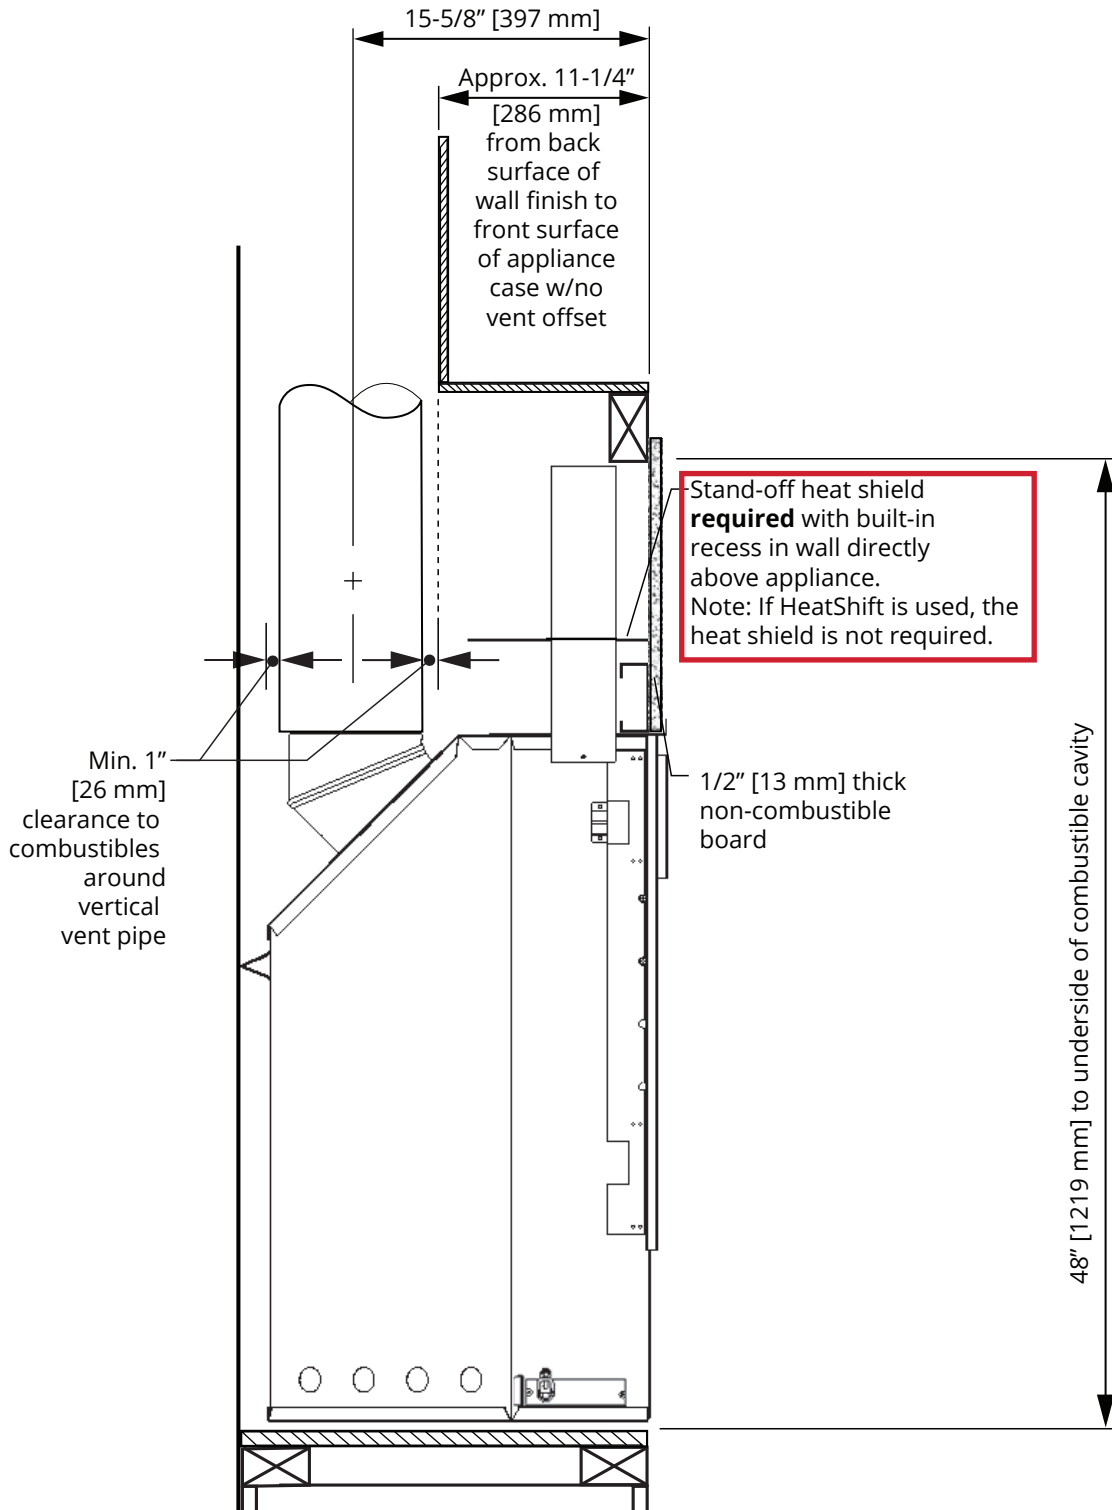


# valor<sup>®</sup> H6 1400M

Nov 2022  
3/3

## Framing—Venting Considerations

### Vertical Takeoff

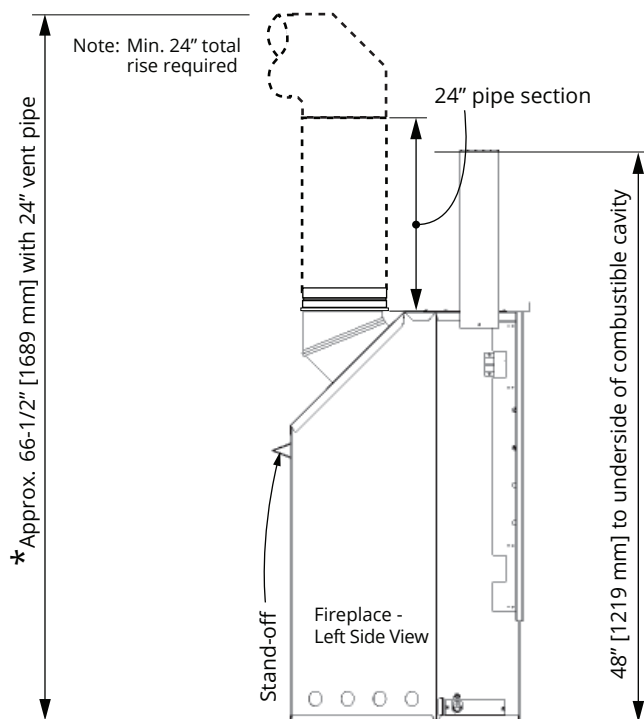

### Venting Considerations

#### \*Notes—ALL venting considerations

- Dimensions of venting are based on using Dura-Vent elbows. Elbow curve radius dimensions will vary when using other brands. In general, other brands have slightly bigger radius.
- 3 inches clearance to combustibles required above horizontal pipe. Slope horizontal pipe upwards 1/4 inch per foot. 1 inch clearance required around sides and bottom of horizontal pipe and around vertical pipe.
- When calculating effective pipe lengths subtract approximately 1-1/2 inch for pipe joint - for example, a 12 inches pipe section will add approximately 10-1/2 inches overall.

### Horizontal Takeoff

