

THE SCIENCE OF WARMTH

Since 1890, we've been pioneering and perfecting radiant heat technology that generates constant, comfortable warmth within your home.

CERAMIC GLASS

Durable and robust ceramic glass improves radiant performance.

ADJUSTABLE HEAT

Adjustable flame for constant, even warmth without having to cycle the fire on and off.

ON FRONT:

H6 TRADITIONAL LOGS 1400LSK HERRINGBONE 1475HBL 1" FIXED FRAME 1430FFK

REALISTIC LOGS

High definition, low mass fiber ceramic logs heat up and glow quickly, radiating warmth.

Proudly Made in North America

RADIANT HEAT

We put radiant warmth into every fire. You can feel the difference a Valor fire makes.

CONVECTIVE HEAT

Secondary heat exchanger naturally improves convective heat—without a fan.

HEATSHIFTTM SYSTEM

Valued artwork, a TV or construction materials stay cooler despite the heat of our fireplaces.

ENHANCED FLAME

Our fires create realistic, soothing flames and ambient glowing embers that radiate heat.

FFFICIENCY

Radiant heat and zone heating technology are up to 30% more efficient than central forced air systems.

ALUMINIZED STEEL

Lightweight, high temperature aluminized steel firebox and heat exchanger deliver efficient warmth, preventing rust and wear.

SAFETY

Our fires are put through rigorous safety testing in our in-house CSA approved lab.

LOGS 1400LSK

Please Note: Printed images may vary from actual product. All product information is accurate at time of printing and is subject to change. For more visit **valorfireplaces.com**








2 LINERS

A liner can change the whole look of a fireplace and fire. Consider a firebox liner that complements your front as well as your firebed.

PLAIN BLACK




BLACK FLUTED



REFLECTIVE GLASS



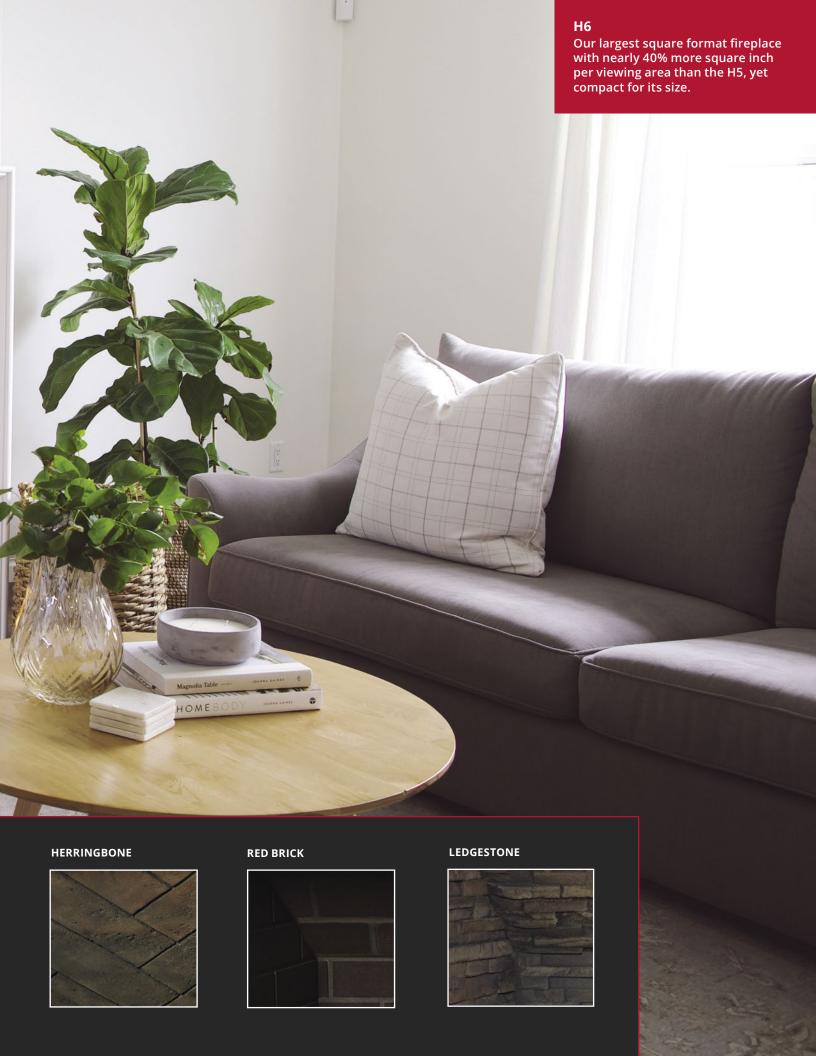



3 FRONTS

We offer a select group of our best fronts for the H6 fireplace. Consider the style of the room, and the fuel bed and liner when choosing a front. To see more examples, visit your local Valor dealer or valorfireplaces.com

FIXED FRAME 31½"h x 41¾"w



3-SIDED BLACK 36¾"h x 46¼"w










HeatShift keeps your valued artwork, a TV or construction materials cooler—ideal for wood cladding!

Find out more at valorfireplaces.com/heatshift





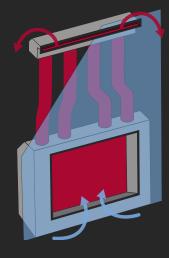

KEEPS WALL COOLER

Pioneered by Valor, our unique HeatShift System naturally circulates up to 125 cubic feet of convective heat per minute through hidden ducts and back into the room—avoiding surface areas above the fireplace.

DESIGN ELEVIRILITY

Run standard finishing materials right up to the fireplace surround, including drywall, wood, tile and stone.

Install mantels lower than usual at a one-to-one ratio of depth to height from the fireplace surround.



IMPROVES PERFORMANCE

Harnessing convective warmth, up to 60% of fireplace heat rises and flows through HeatShift and back into the room. The remaining radiant heat emanates from the fireplace, keeping you warm.

NO ELECTRICITY REQUIRED

Heatshift circulates heat naturally using gravity and Valor product ingenuity—no need for a fan or electricity. No power—no problem.

CONSTRUCTION MADE EASY

Unlike many competing products, Valor fully ducts
HeatShift for clean, safe air quality. HeatShift is built and designed in North America for North American homes, meeting building code requirements.



REMOTE CONTROL—STANDARD

VALOR REMOTE GV60

Your remote lets you select, adjust or program your desired temperature—the fire automatically adjusts to maintain the temperature of the room. Your remote even allows you to turn your pilot light on or off from the comfort of your sofa.

REMOTE BATTERY + WALL SWITCH RBWSK

Can't find your remote? Your wall switch allows you to do basic functions. Time to replace your receiver batteries? The switch provides easy access to the receiver batteries. To find out more, visit valorfireplaces.com/remote







ENERGY EFFICIENCY

While the North American fireplace industry is largely self-regulated, at Valor we use recognized Canadian and US government testing methods to determine our energy efficiencies, and ensure our products perform in your home as rated. All our fireplaces are available as natural gas or propane.


The built-in Secondary Heat Exchanger naturally improves convective heat removing the need for a fan. Your fire will heat up fast for immediate comfort—and no electrical hookup will save you money.

To find out more, visit






FRAMING AND VENTING

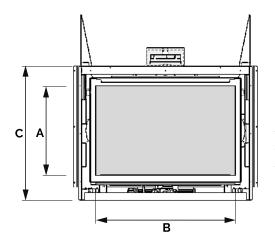


window

Α	25½"
В	36%"
С	34½"


Н	48"
W	44"
D	20%"

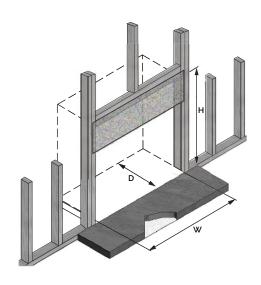




ALWAYS REFER TO THE MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.



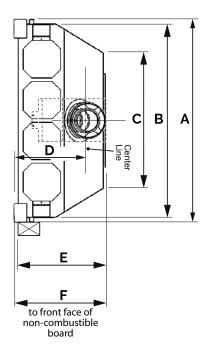

Α	43%"
В	42¼"
С	27%"
D	15%"
Е	19%"
F	20%"

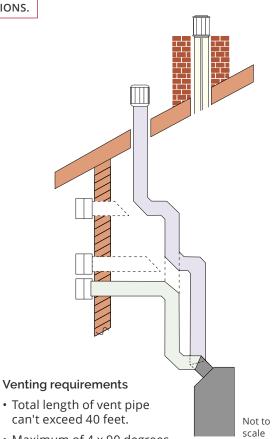

- can't exceed 40 feet.
- Maximum of 4 x 90 degrees elbows or equivalent (2 x 45 degrees—90 degrees).
- Requires minimum 24" vertical rise with horizontal termination.

OPTIONS

DIRECT VENT ENGINE

Natural Gas	1400KN
Propane	1400KP

1 FIRE BEDS

Traditional Logs	1400LSK
Pebble Beach Driftwood	1400DWK
Murano Glass	1400DGM
Decorative Glass	1400DGS

2 LINERS

Plain Black	1460PBL
Fluted Black	1425FBL
Reflective Glass	1470RGL
Herringbone	1475HBL
Red Brick	1410VRL
Ledgestone	1415LSL

3 FRONT

Fixed Frame , Black	1"	1430FFK
3-sided, Black	3¼"	1435TSB
4-sided, Black	4"	1440FSB2
4-sided, Bronze	4"	1440FSZ

OPTIONAL

Reflective Glass Rear Panel*	1405RGP
Decorative Rock**	1506DRK
Outdoor Conversion Kit	GV60CKO
Remote Blower for Zone Heating	1270RBK
Circulating Fan	1195CFK

^{*}For Fluted or Plain Black liner only.

HEATSHIFT Recommended

48" Plenum + Finishing Frame	LDK1 + LDK2
14" Plenums + two grilles	LDK3
38" Plenum + Finishing Frame	LDK4 + LDK5
Valance, two plates	LDK7

△ WARNING

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov







^{**}For Pebble Beach Driftwood only.

