


Overview

⚠ WARNING
Ensure weight of wall above is NOT carried by the appliance.

Vent collar supplied as 5 x 8" outlet, field convertible to 4 x 6-5/8" outlet (adapter supplied). Note - Vertical rise required in vent system when adapting to 4 x 6-5/8" venting

HeatShift Plenum (front or sides) or Duct Termination Plates (top) **mandatory!** HeatShift system supplied separately—see HeatShift information in Appendix D of fireplace's manual

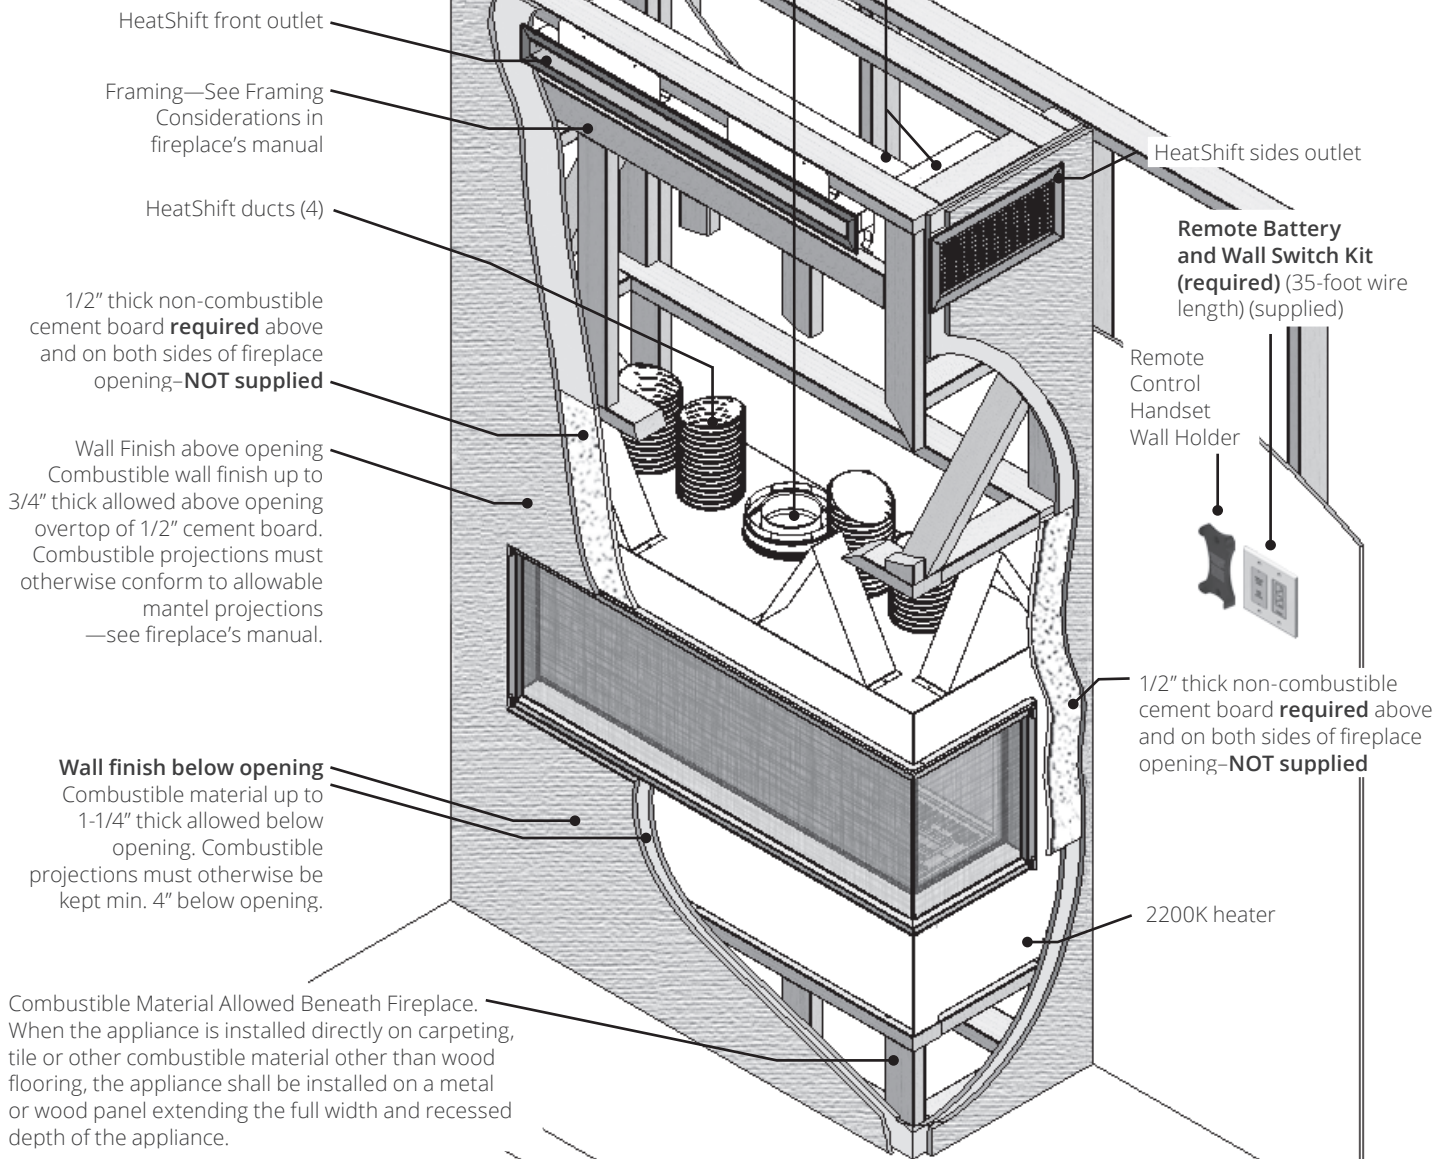

This appliance may be installed in outdoor, weather protected environments as defined in the GV60CKO Outdoor Conversion Kit instruction manual.
However, NO electrical connections are allowed for any outdoor installation.